
HYDFLEX E:

ELECTRIC CRIMPING MACHINE

NK-30

Professional workshop hose crimping machine. Its technical specs allow it to crimp the most popular hoses on the market, 1SN, 2SN & 4 SP all up to an ID of 1¹/₄" (DN 32 mm).



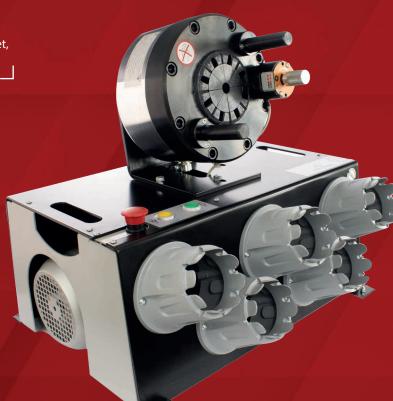

TECHNICAL SPECIFICATIONS

MODEL	NK-30	
DIMENSIONS	590 mm x 400 mm x 580 mm	
WEIGHT	70 kg	
MAX CRIMPING FORCE	135 ton (at 340 bar)	
MAX OPENING WITH DIES	Die \emptyset + 28 mm	
MAX OPENING WITHOUT DIES	98 mm	
MASTER DIE SIZE D/L	75 mm	
	1 WIRES (1SN) 1.1/2" (DN 38 mm)	
MAX INSIDE DIAMETERS	2 WIRES (2SN) 1.1/2" (DN 38 mm)	
OF CRIMPED HOSES	4 WIRES (4SP) 1.1/4" (DN 32 mm)	
	6 WIRES 3/4" (DN 19 mm)	
	Maximal size of elbow BSP 1.1/4"	
	Maximal dimension of crimping 57 mm	
	Minimal dimension of crimping 6 mm	
MOTOR POWER	2.2 kW – 400V 3-PH 50hz (NK30.1)	
	2.2 kW – 230V 1-PH 50Hz (NK30.3)	
DIE DIMENSIONS	Die Ø mm 04 06 08 10 12 15 18 21 24 27 30 33 39 45 48 51	1 5
	Length mm 56 70	
ACCESSORIES	PDR-1 – Single die change tool	
This model is also available with a separate head and motor,	ST-12-PDR – Workshop desk, complete with 12 die set storage panel	
which reduces its weight and allows for easier mounting in mobile	WP-12-PDR – Die set panel to store 12 die sets	
workshops	QCG-NLS – Quick change tool for entire die sets	

18





NK-30

HYDFLEX **E**





