
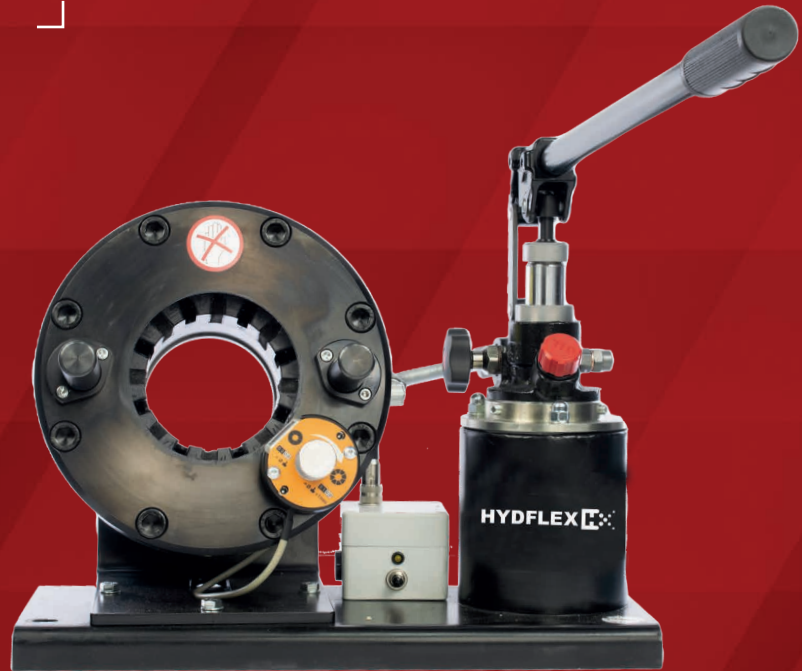


### NKH-25

This crimpers technical specs allow it to crimp the most popular hoses on the market, 1SN, 2SN & 4 SP all up to an ID of 1 1/4" (DN 32 mm).

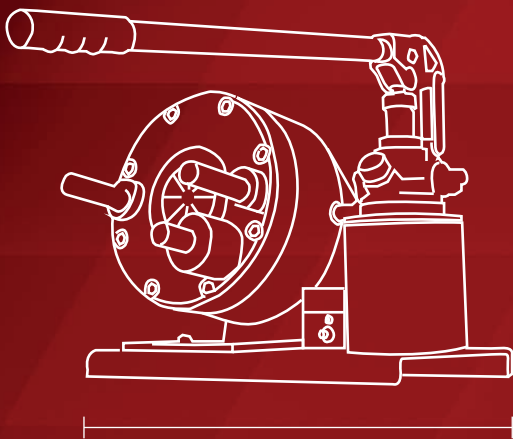

### TECHNICAL SPECIFICATIONS

MODEL	NKH-25	
DIMENSIONS	500 mm x 300 mm x 550 mm	
WEIGHT	40 kg	
MAX CRIMPING FORCE	135 ton	
MAX OPENING WITH DIES	Die Ø + 18 mm	
MAX OPENING WITHOUT DIES	90 mm	
MASTER DIE SIZE D/L	60 mm	
MAX INSIDE DIAMETERS OF CRIMPED HOSES	1 WIRES (1SN)	1.1/2" (DN 38 mm)
	2 WIRES (2SN)	1.1/2" (DN 38 mm)
	4 WIRES (4SP)	1.1/4" (DN 32 mm)
	6 WIRES	3/4" (DN 19 mm)
	Maximal size of elbow BSP	5/8"
	Maximal dimension of crimping	57 mm
	Minimal dimension of crimping	6 mm
MOTOR POWER	2 speed manual hydraulic pump Speed 1. – Fast pumping (25 cm <sup>3</sup> / stroke, max. 50b) Speed 2. – Crimping pumping (5 cm <sup>3</sup> / stroke, max. 320b)	
DIE DIMENSIONS	Die Ø mm	04 06 08 10 12 15 18 21 24 27 30 33 39 45 48 51
	Length mm	56 70
ACCESSORIES	PDR-1 – Single die change tool ST-12-PDR – Workshop desk, complete with 12 die set storage panel WP-12-PDR – Die set panel to store 12 die sets QCG-NLS – Quick change tool for entire die sets	



**QUICK CHANGE TOOL**



**DIE PANEL**



**PRECISE CALIBRATOR**



**DIE SET SLOT**



**SIGNAL BOX**



**SINGLE DIE CHANGE TOOL**